

Features

- Extended temperature range
- Flexible Probe
- Silicone rubber enclosed cable
- Rugged
- Reusable
- Submersible
- Programmable start time
- Real-time operation
- N.I.S.T. traceable
- Easy-to-use software
- Modest cost

Applications


- Autoclave Verification
- Medical/Pharmaceutical
- HACCP Compliance
- Food preparation and processing
- Environmental studies
- Dishwasher testing
- Extreme temperature monitoring

The HiTemp150FP is a small, rugged, reusable temperature data logger specifically designed for deployment in harsh environments. The HiTemp150FP comes standard with a 24" flexible silicone rubber enclosed cable, 4" penetration style stainless steel probe, and 316 stainless steel body (other cable and probe lengths available through special order). With a measurement range of -40°C to $+150^{\circ}\text{C}$, the HiTemp150FP is perfect for use in autoclaves, medical and pharmaceutical labs, food preparation and processing plants, dishwashers, and other applications involving extreme temperatures.

The HiTemp150FP features an RTD temperature sensor, which allows for extremely fast response times and highly accurate readings. Reading rates are configurable from once every second to once every twelve hours. With a reading capacity of 32,767 data points, the HiTemp150FP is perfect for use in even the longest of processes. Its real time clock ensures that all data is time and date stamped, making it easy to track and analyze temperature changes. The logger can be set for an immediate start or for activation at a future date and time, allowing for simultaneous data recording via the deployment of multiple loggers. Its non-volatile solid state memory keeps written data intact, even if the battery, which is user changeable, becomes discharged.

One of the most powerful features of the HiTemp150FP is the accompanying software. EC2 LINK easy-to-use Windows® based program features a variety of powerful tools, all of which work together to allow for the effortless creation and exportation of professionally formatted spreadsheets and customized graphs. Complex analyses, such as Mean Kinetic Temperature, Sterilization Units, and Pasteurization Units, can be performed with just one click of the mouse.

In addition to data analysis, ECSquared's software is used for the digital calibration of the HiTemp150FP. Thanks to the software's easy calibration wizard, this task can be quickly performed by even the most novice of computer users. For those requiring an additional guarantee of accuracy, N.I.S.T. calibration certificates are available.

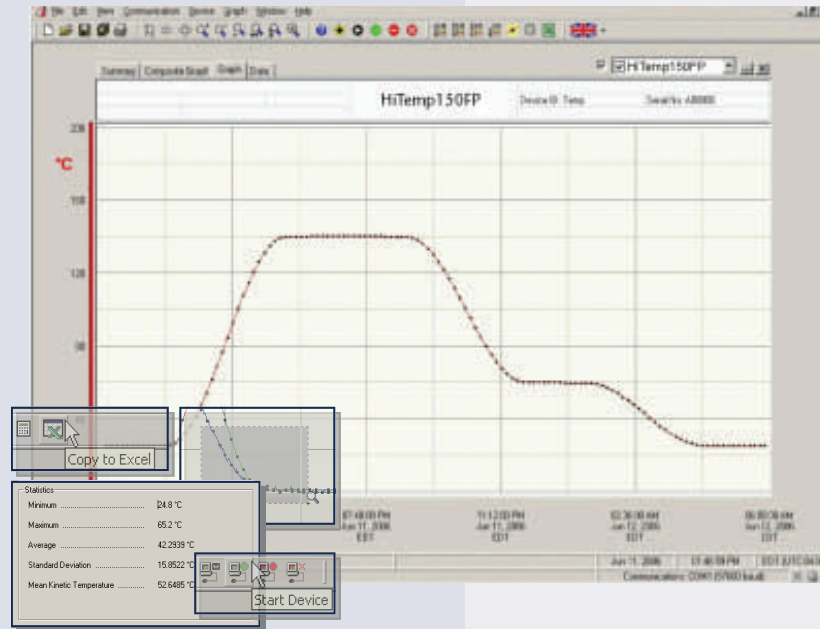

EC2 LINK Software

Reports temperature data in an easy to use graph.

The Windows®-based software package allows the user to effortlessly collect, display and analyze data. A variety of powerful tools allow you to examine, export, and print professional looking data with just a click of the mouse.

HITEMP150FP SPECIFICATIONS

Temperature Sensor: 100Ω Platinum RTD	Data Format: Date and time stamped °C, °F, K, °R
Temperature Range: -40 to +150°C	Time Accuracy: ±1 minute/month at 20°C (RS232 cable not in use)
Temperature Resolution: 0.05°C	Computer Interface: PC serial or USB (interface cable required); 2,400 baud
Calibrated Accuracy: ±0.5°C (Over 100°C span)	Software: Windows 95/98/ME/NT/2000/XP/Vista based software
Start Modes: Software programmable immediate start or delay start up to six months in advance	Operating Environment: -40 to +150°C, 0 to 100% RH
Real Time Recording: May be used with PC to monitor and record data in real time	Dimensions (Body): 1.1" x 1.75" dia. (28mm x 45mm dia.)
Memory: 32,767 readings	Dimensions (Cable*): 2.0' x .14" dia. (610 mm x 4mm dia.)
Reading Rate: One second up to once every 12 hours.	Dimensions (Probe Handle): 1½" x 3/8" dia. (39mm x 10 mm dia.)
Lethality Equations: Sterilization unit and Pasteurization units are available in the software with a click of a button	Dimensions (Probe): 4" x 1/8" dia. (102mm x 4mm dia.) (Other Probe lengths available upon request)
Calibration: Digital calibration through software	Material (Body & Probe): 316 stainless steel
Calibration Date: Automatically recorded within device	Material (Cable): Silicone rubber
Battery Type: 3.9V high-temperature lithium battery included	Approvals: CE
Battery Life: 1 year typical (1 min. reading rate @ 25°C)	Weight: 9 oz (255 g)

WARNING: FIRE, EXPLOSION, AND SEVERE BURN HAZARD. DO NOT SHORT CIRCUIT, CHARGE, FORCE OVERDISCHARGE, DISASSEMBLE, CRUSH, PENETRATE OR INCINERATE. BATTERY MAY LEAK OR EXPLODE IF HEATED ABOVE 150° C(302° F).

SOFTWARE FEATURES

Multiple Graphs: Simultaneously analyze data from several units or deployments; easily switch to a single data series	Statistics: Calculate average, min, max, standard deviation, and mean kinetic temperature with the touch of a button
Real-Time Recording: Collect and display data in real-time while continuing to log	Export Data: Export data in a variety of common formats, or switch to Excel® with a single click
Graphical Cursor: One click displays readings by time, value, parameter or sample number	Calibration: Automatically calculate and store calibration parameters
Data Table: Instantly access tabular view for detailed dates, times, values, and annotations	Logger Configuration: Easy set up and launch of data loggers with immediate or delayed start, preferred sample rate, and device ID
Scaling Options: Autoscale function fits data to the screen, or allows user to manually enter their own values	Printing: Automatically print graphical or tabular data
Formatting Options: Change colors, line styles, plotting options, show or hide channels quickly	

*SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. SPECIFIC WARRANTY AND REMEDY LIMITATIONS APPLY.

ORDERING INFORMATION

<u>Model</u>	<u>Description</u>	<u>Price (U.S.)</u>
HITEMP150FP	Extended Range Temperature Recorder with Flexible Probe	Call for Pricing
IFC110	Software, manual and RS232 interface cable	Call for Pricing
IFC200	Software, manual and USB interface cable	Call for Pricing
NIST	N.I.S.T. Calibration Certificate	Call for Pricing
3B5700	Replacement battery for HiTemp150FP	Call for Pricing

ASK ABOUT OUR OTHER DATA ACCUMULATORS

Temperature	Pulse/Event/State
Humidity	Low Level Current
Pressure	Low Level Voltage
pH	RF Transmitters
Level	Intrinsically Safe
Shock	Spectral Vibration
LCD Display	

For Quantity Discounts call 302-750-8554 or email info@ecsquared.net

Ecsquared Inc.